

Exact Cover with light

Mihai Oltean, Oana Muntean
Department of Computer Science,
Faculty of Mathematics and Computer Science,
Babeş-Bolyai University, Kogălniceanu 1,
Cluj-Napoca, 400084, Romania.
mihai.oltean@gmail.com
oana_muntean85@yahoo.com
<https://mihaioltean.github.io/optical>

Abstract

We suggest a new, unconventional, way for solving the Exact Cover problem by using the massive parallelism of light. The idea is to build a device which can generate all possible solutions of the problem and then to pick the correct one. In our case the device has a graph-like representation and the light is traversing it by following the routes given by the connections between nodes. The nodes are connected by arcs in a special way which lets us to generate all possible covers (exact or not) of the given set. For selecting the correct solution we assign to each item, from the set to be covered, a special integer number. These numbers will actually represent delays induced to light when it passes through arcs. The solution is represented as a subray arriving at a certain moment in the destination node.

Keywords: Light-based computing, NP-complete problems, Exact Cover

1 Introduction

In this paper we propose an unconventional device, which uses light, for solving the Exact Cover (XC) problem [7]. This problem can be simply stated as follows: Given a set U and C a set of subsets of U , the problem asks to find if there is a subset S of C such that each element of U appears once in S .

We have decomposed the problem in 2 subproblems: generating all subsets of C and then selecting the correct one.

For the first step we have designed a light-based device which has a graph-like structure. Each arc can represent either an element of C or can be a skipping arc. An arc will actually delay the signal (light) which passes through by a certain amount of time. The nodes are connected by arcs in such way all possible subsets of C are generated.

For the second part we have assigned, to each item from U , a special positive number such that sum of all numbers assigned to U is not equal to any other combination of numbers assigned to items from U . The delay induced by an arc is actually equal to the sum of numbers belonging to the element from C attached to that arc.

Initially a light ray is sent to the Start node. In each node the light is divided into 2 subrays. Each arc delays the ray by an amount of time equal to the number assign to it. Let us denote by B the sum of the numbers assigned to items from U . At the destination node we will check if there is a ray arriving in the destination node at the moment equal to B (plus some constants introduced by the system). If there is such signal it means that we can have an exact cover for U . Otherwise U does not have an exact cover. This is guaranteed by the special numbers assigned to each item from U .

The paper is organized as follows: Related work in the field of optical computing is briefly overviewed in section 2. The Exact Cover problem is described in section 3. Useful properties of light are discussed in section 4.1. The proposed device is presented in section 5. We describe both the way in which all possible subsets of a given set are generated (see section 5.1) and we also show how to detect the set covering U exactly (see section 5.2). The way in which the proposed device works is given in section 5.3. A list of components required by the proposed device is given in section 6.2. Weaknesses of our device are discussed in sections 6.3-6.5. Suggestions for improving the device are given in section 7. Further work directions are suggested in section 8.

2 Related work

Using light instead of electric power for performing computations is not a new idea. Optical Character Recognition (OCR) machines [25] were one of the first modern devices which are based on light for solving a difficult problem. Later, various researchers have shown how light can solve problems faster than modern computers. An example is the n -point discrete Fourier transform computation which can be performed in only unit time [8, 20].

An important practical step was made by Intel researchers who have developed the first continuous wave all-silicon laser using a physical property called the Raman Effect [5, 18, 21, 22]. The device could lead to such practical applications as optical amplifiers, lasers, wavelength converters, and new kinds of lossless optical devices.

Another solution comes from Lenslet [12] which has created a very fast processor for vector-matrix multiplications. This processor can perform up to 8000 Giga Multiple-Accumulate instructions per second. Lenslet technology has already been applied to data analysis using k -mean algorithm and video compression.

In [23] the idea of sorting by using some properties of light is introduced. The method called Rainbow Sort is based on the physical concepts of refraction and dispersion. It is inspired by the observation that light that traverses a

prism is sorted by wavelength. For implementing the Rainbow Sort one need to perform the following steps:

- encode multiple wavelengths (representing the numbers to be sorted) into a light ray,
- send the ray through a prism which will split the ray into n monochromatic rays that are sorted by wavelength,
- read the output by using a special detector that receives the incoming rays.

A stable version of the Rainbow Sort is proposed in [14].

Naughton (et al.) proposed and investigated [15, 26] a model called the continuous space machine which operates in discrete time-steps over a number of two-dimensional complex-valued images of constant size and arbitrary spatial resolution. The (constant time) operations on images include Fourier transformation, multiplication, addition, thresholding, copying and scaling.

A system which solves the Hamiltonian path problem (HPP) [7] by using light and its properties has been proposed in [16]. The device has the same structure as the graph where the solution is to be found. The light is delayed within nodes, whereas the delays introduced by arcs are constants. Because the problem asks that each node has to be visited exactly once, a special delaying system was designed. At the destination node we will search for a ray which has visited each node exactly once. This is very easy due to the special properties of the delaying system.

3 The Exact Cover problem

The description of the Exact Cover problem [7] is the following:

Given a set $U = \{u_1, u_2, \dots, u_n\}$ of elements and a set C of subsets of U , an exact cover is a subset S of C such that every element in U is contained in exactly one set in S .

Our purpose is to solve the YES/NO decision problem. This means that we are not interested to compute the actual subset S . Rather, we are interested in finding whether a solution does exist or not.

The problem belongs to the class of NP-complete problems [7]. No polynomial time algorithm is known for it.

In what follows we denote by m the cardinal of C .

3.1 Example

$$\begin{aligned} U &= \{u_1, u_2, \dots, u_5\} \\ C &= \{C_1, C_2, C_3, C_4, C_5, C_6\} \\ C_1 &= \{u_1, u_3\} \\ C_2 &= \{u_1, u_2, u_5\} \end{aligned}$$

$$\begin{aligned} C_3 &= \{u_2\} \\ C_4 &= \{u_1, u_4, u_5\} \\ C_5 &= \{u_2, u_3, u_4\} \\ C_6 &= \{u_4, u_5\} \end{aligned}$$

An exact cover for U is :

$$S = \{C_1, C_3, C_6\}.$$

We are not thinking to U as a set of numbers. Rather we adopt a more general definition: U is a set of items. We do this in order to avoid confusion which might appear because, later in this paper (see section 5.2), we will attach positive integer numbers to each item in U . Those numbers have some special properties and they should not be confounded with the actual value of the items u_i (in the case that these values are numerical).

4 Why light is good for our purpose ?

In this section we argue why light can be used as possible medium for the implementation. We also describe the operations which are performed within our device.

4.1 Useful properties of light

Our idea is based on two properties of light:

- The speed of light has a limit. The value of the limit is not very important at this stage of explanation. The speed will become important when we will try to measure the moment when rays arrive at the destination node (see section 6.3). What is important now is the fact that we can delay the ray by forcing it to pass through an optical fiber cable of a certain length.
- The ray can be easily divided into multiple rays of smaller intensity/power. Beam-splitters are used for this operation.

4.2 Operations performed within our device

The proposed device has a graph like structure. Generally speaking one operation is performed when a ray passes through a node and one operation is performed when a ray passes through an arc.

- When passing through an arc the light ray is delayed by the amount of time assigned to that arc.
- When the ray is passing through a node it is divided into a number of rays equal to the external degree of that node. Each obtained ray is directed toward one of the nodes connected to the current node.

5 The proposed device

We have divided our problem into 2 small subproblems:

- to generate all possible subsets of C . We show how our device is capable of performing this operation in section 5.1.
- to find if there is a subset of C which contains each element of U exactly once. This is possible due to the special properties of the numbers assigned to each item from U (see section 5.2).

5.1 Generating all subsets of C

First of all we assign to each item u_i from U a positive number (d_i). The way in which these numbers are constructed is described in section 5.2. We will use these numbers when we will compute the moment when a particular ray has arrived at the output of our device. The sum of all these numbers is denoted by B .

In this section we want to design a device that will generate all possible subsets of C .

The first idea for our device was that elements from the given set C represent the delays induced to the signals (light) that passes through our device. For instance, if elements C_1 , C_3 and C_6 generate the expected exact cover, then the total delay of the signal should be $delay(C_1) + delay(C_3) + delay(C_6)$. By $delay(C_i)$ we denote the delay introduced by C_i (which is a subset of U). The $delay(C_i)$ is computed as sum of delays induced by each item (from U) belonging to C_i .

If using light we can easily induce some delays by forcing the ray to pass through an optical cable of given length.

This is why we have designed our device as a direct graph. Arcs, which are implemented by using optical cables, are labeled with numbers representing delays of subsets $C_i (1 \leq i \leq m)$. Each subset is assigned to exactly one arc and there are no two arcs having assigned the same subset. There are $m + 1$ nodes connected by m arcs. At this moment of explanation we have a linear graph as the one shown in Figure 1.

However, this is not enough because we also need an mechanism for skipping an arc encoding an element of C . Only in this way we may generate all possible subsets of C .

A possible way for achieving this is to add an extra arc (of length 0) between any pair of consecutive nodes. Such device is depicted in Figure 2. A light ray sent to start node will have the possibility to either traverse a given arc (from the upper part of figure) or to skip it (by traversing the arc of length 0 from the bottom of figure).

In each node (but the last one) we place a beam-splitter which will split a ray into 2 subrays of smaller intensity.

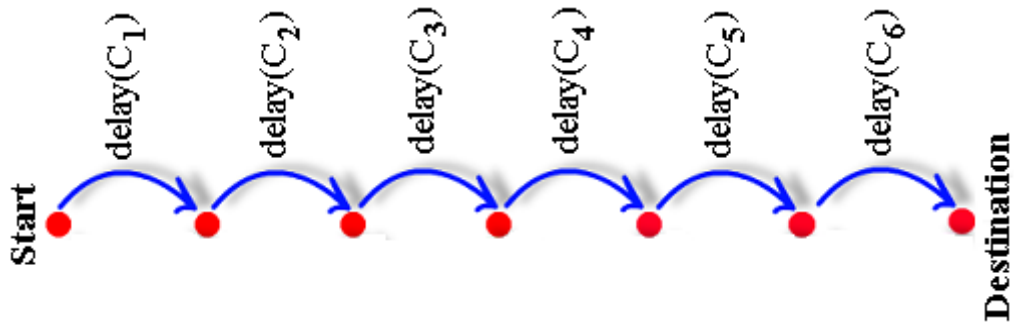


Figure 1: First version of our device. Each arc delays the ray by the amount of time written on it. Note that this device is not complete because it cannot generate all possible subsets of C .

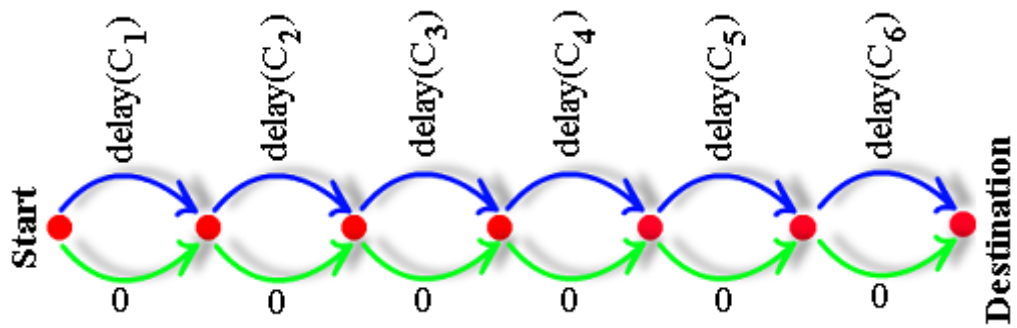


Figure 2: Second version of our device. Each subset of C is generated, but this device cannot be implemented in practice because we cannot have cables of length 0.

The device will generate all possible subsets of C . Each subset will delay one of the ray by an amount of time equal to the sum of the lengths of the arcs in that path.

There is a problem here: even if theoretically we could have arcs of length 0, we cannot have cables of length 0 in practice. For avoiding this problem we have multiple solutions. The first one was to use very short cables (let's say of length ϵ) for arcs which are supposed to have length 0. However, there is another problem here: we could obtain for instance the sum B written as $B = a_1 + 3 * \epsilon$. Even if there is no subset of sum B , still there will be possible to have a signal at moment B due to the situation presented above.

For avoiding this situation we have added a constant k to the length of each cable. The schematic view of this device is depicted in Figure 3.

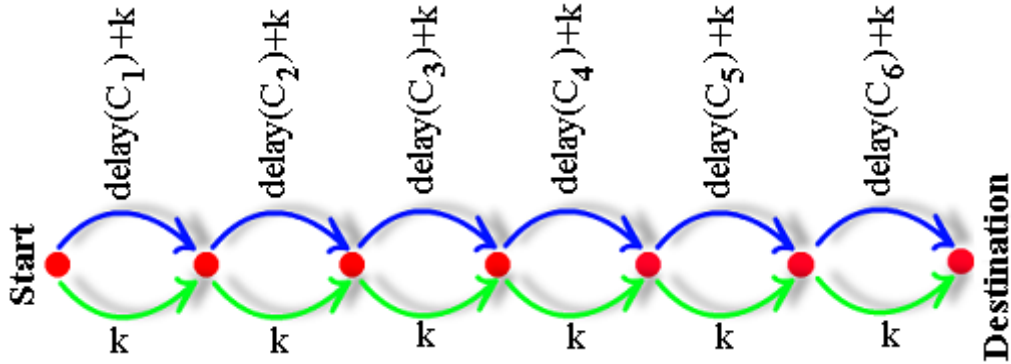


Figure 3: A schematic representation of the device used for solving an instance with 6 elements in C . On each arc we have depicted its length. There are n cables of length k and m cables of length $\text{delay}(C_i) + k$ ($1 \leq i \leq m$). This device does generate all possible subsets of C and it can be implemented in practice

We can see that each path from *Start* to *Destination* contains exactly m time value k . Thus, at the destination we will not wait anymore at moment B . Instead we will wait for a solution at moment $B + m * k$ since all subsets will have the constant $m * k$ added.

In Figures 1, 2 and 3 we have not depicted the items u_i from each C_k ($1 \leq k \leq m$). The delays introduced by each u_i (see section 5.2) are actually in the delays of all C_k containing u_i .

This trick has solved one of the problems related to our device. It shows how to generate all possible subsets of C . However, this is not enough. Another requirement of the problem is that each element of U to be represented once in the exact cover solution. For solving this problem we assign to each element in U a special integer value. These values will be chosen in such way will be possible to easily identify the exact cover solution at the destination node.

In the next section we show how to decide if is there a subset of C which contains each element of U exactly once.

5.2 Labeling system

We start by a simple definition about what we mean by a ray passing through an item of U .

We say that a ray has visited (passed through) a certain element u_i of U if that ray has passed through an arc representing one of the subsets of C_k which contains element u_i . Please note that C_k can contain more elements from U and if one of them is visited by a ray it means that all of them are visited by that ray since the light has no chance of avoiding parts of an arc once it has started to traverse it.

Take for instance set C from our example (section 3.1). If the arc encoding C_4 is visited by a light ray it means that all items from that set (namely u_1 , u_4 and u_5) are visited.

At the destination node we will wait for a particular ray which has visited each element of U exactly once. This is why we need to find a way to label that particular ray so that it could be easily identified.

Recall from section 5.1 that the rays passing through an arc are marked by delaying them with a certain amount of time. This delay can be easily obtained by forcing the rays to pass through an optical fiber of a certain length. Roughly speaking, we will know if a certain ray has generated an exact cover only if its delay (at the destination node) is equal to the sum of delays induced by all items from U .

We know exactly the particular moment when the expected ray (the one which has generated an exact cover) will arrive. This moment is B (the sum of numbers attached to items from U). In this case the only thing that we have to do is to "listen" if there is a fluctuation in the intensity of the signal at that particular moment. Due to the special properties of the proposed system we know that no other ray will arrive, at the destination node, at the moment when the ray generating the exact cover has arrived.

The delays, which are introduced by each arc (which is actually the sum of delays of particular items from U), cannot take any values. If we would put random values for delays we might have different rays (which are not covering U exactly) arriving, at the destination node, in the same time with a ray representing an exact cover. This is why we assign, to each element u_i of U , a special number (denoted by d_i).

We need only the ray, which has generated the exact cover, to arrive in the destination node at the moment equal to the sum of delays of each item u_i (the moment when the ray has entered in the start node is considered moment 0). Thus, the delaying system must have the following property:

Property of the delaying system

Let us denote by d_1, d_2, \dots, d_n the delays that we plan to attached to u_1, u_2, \dots, u_n . A correct set of values for this system must satisfy the condition:

$$d_1 + d_2 + \dots + d_n \neq a_1 \cdot d_1 + a_2 \cdot d_2 + \dots + a_n \cdot d_n,$$

where a_i ($1 \leq i \leq n$) are natural numbers ($a_i \geq 0$) and cannot be all 1 in the same time.

Basically speaking a_k tell us how many times the ray has passed through an element u_k . Thus, if value a_k is strictly greater than 1 it means that the ray has passed at least twice through element u_k . Note that an element u_i can belong to multiple subsets from C . For instance, in the example from section 3.1 we can see that element u_1 belongs to 3 subsets (C_1 , C_2 and C_4).

Actually each item u_i can appear no more than m times on any path between Start and Destination (see Figure 3). This is because the cardinal of C is m and each C_k ($1 \leq k \leq m$) is a subset of U (that is each element from U can appear no more than once). In our case we were not interested to depend on particular values for m . This is why when we have designed the system of numbers d_i ($1 \leq i \leq n$) we have assumed that each item u_i can appear any times in the final solution (not limited to m times). This is the most general case. Other cases, where has a fixed value can lead to smaller values for numbers d_i .

Some examples of numbers complying with our property are given in Table 1.

Table 1: Some examples. First column contains the cardinal of U . The second column represents the numbers assigned to each element of U .

n	Labels (delays)
1	1
2	2, 3
3	4, 6, 7
4	8, 12, 14, 15
5	16, 24, 28, 30, 31
6	32, 48, 56, 60, 62, 63

From Table 1 it can be easily seen that these numbers follow a general rule. For a problem with n elements in U one of the possible labeling systems is:

$$\begin{aligned}
&2^n - 2^{n-1}, \\
&2^n - 2^{n-2}, \\
&2^n - 2^{n-3}, \\
&\dots, \\
&2^n - 2^0.
\end{aligned}$$

Remarks

- In [16] these numbers have been used for solving the Hamiltonian path problem with a light based-device. It was proved [16] that these numbers satisfy the previously exposed property. In [17] it was proved this system is minimal (the greatest number is the smallest possible).
- The numbers in this set are also called Nialpdromes (sequence A023758 from The On-line Encyclopedia of Integer Numbers [24]). They are numbers whose digits in base 2 are in nonincreasing order.

- These numbers have been used in [11] for solving NP-complete problems in the context of DNA computers [1],
- The delaying system described above has the advantage of being a general one, but it also has a weakness: it is exponential.

5.3 How the system works

In the graph depicted in Figure 3 the light will enter in *Start* node. It will be divided into 2 subrays of smaller intensity. These 2 rays will arrive into the second node at moments $delay(C_1) + k$ and k . Each of them will be divided into 2 subrays which will arrive in the 3^{rd} node at moments $2 * k, delay(C_1) + 2 * k, delay(C_2) + 2 * k, delay(C_1) + delay(C_2) + 2 * k$. These rays will arrive at no more than 4 different moments.

In the destination node we will have 2^m rays arriving at no more than 2^m different moments. The ray arriving at moment $m * k$ means the empty set. The ray arriving at moment $delay(C_1) + delay(C_2) + \dots + delay(C_n) + m * k$ represents the full set (C). If there is a ray arriving at moment $B + m * k$ means that there a subset of C of sum B (this means an exact cover for U).

If there are 2 rays arriving at the same moment in the *Destination* it simply means that there are multiple subsets which have the same sum (generating the same cover - exact or not). This is not a problem for us because we want to answer the YES/NO decision problem (see section 3). We are not interested at this moment which is the subset generating the solution.

Because we are working with continuous signal we cannot expect to have discrete output at the destination node. This means that rays arrival is notified by fluctuations in the intensity of the light. These fluctuations will be transformed, by a photodiode, in fluctuations of the electric power which will be easily read by an oscilloscope.

6 Complexity

This section answers a very important question: *Why the proposed approach is not a polynomial-time solution for the Exact Cover problem?*

At the first sight one may be tempted to say that the proposed approach provides a solution in polynomial time to any instance of the exact cover problem. The reason behind such claim is given by the ability of the proposed device to provide output to any instance in $O(B)$ complexity. This could mean that we have found a polynomial-time algorithm for the Exact Cover problem. A direct consequence is obtaining solutions, in polynomial time, for all other NP-Complete problems - since there is a polynomial reduction between them [7].

However, this is not our case. There are two main reasons for this:

- the intensity of the signal decreases exponentially with the number of nodes that are traversed. When the ray is passing through a node it

is divided into 2 subrays. If divided uniformly we could have a 2 times decrease in the intensity for each subray. If a ray is passing through 10 nodes we can have a decrease of 2^{10} times from the initial power. A possible way for handling this issue is discussed in section 6.4.

- The numbers assigned to each item in U increase exponentially with the cardinal of U .

6.1 Physical implementation of the system: difficulties and solutions

This section describes the components required for the physical implementation of the system and some difficulties that might appear during construction and testing.

6.2 Components

For implementing the proposed device we need the following components:

- a source of light (laser),
- Several beam-splitters for dividing light rays into 2 subrays. A standard beam-splitter is designed using a half-silvered mirror (see Figure 4),
- A high speed photodiode for converting light rays into electrical power. The photodiode is placed in the destination node,
- A tool for detecting fluctuations in the intensity of electric power generated by the photodiode (oscilloscope),
- A set of optical fiber cables having lengths equals to the numbers in set U (plus constant k) and another set of m cables having fixed length k . These cables are used for connecting nodes.

6.3 Precision

Another problem is that we cannot measure the moment $B + m * k$ exactly. We can do this measurement only with a given precision which depends on the tools involved in the experiments. Actually it will depend on the response time of the photodiode and the rise time of the oscilloscope.

The rise-time of the best oscilloscope available on the market is in the range of picoseconds (10^{-12} seconds). This means that if a signal arrives at the destination in the interval $[B + m * k - 10^{-12}, B + m * k + 10^{-12}]$ we cannot be perfectly sure that we have an exact cover or another one which does not have the wanted property. This problem can be avoided if all cables are long enough. In what follows we will try to compute the length of the cables.

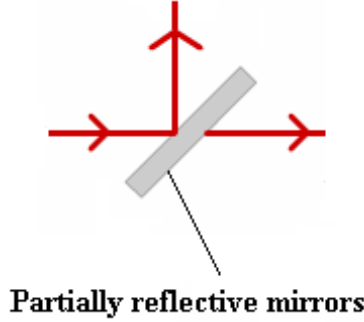


Figure 4: The way in which a ray can be split into 2 sub-rays by using a beam-splitter.

We know that the speed of light is $3 \cdot 10^{11} m/s$. Based on that we can easily compute the minimal cable length that should be traversed by the ray in order to be delayed with 10^{-12} seconds. This is obviously 0.3 meters.

This value is the minimal delay that should be introduced by an arc. More than that, all lengths must be integer multiples of 0.3. We cannot allow to have cables whose lengths can be written as $p \cdot 0.3 + q$, where p is an integer and q is a positive real number less than 0.3 because by combining this kind of numbers we can have a signal in the above mentioned interval and that signal does not encode a subset whose sum is the expected one.

Once we have the length for that minimal delay is quite easy to compute the length of the other cables that are used in order to induce a certain delay. First of all we have to divide all delays introduced by $C_k (1 \leq k \leq m)$ with such factor that the less significant digit (greater than 0) to be on the first position before the decimal place. For instance if we have $delay(C_1) = 100$ and $delay(C_2) = 2000$ we have to divide both numbers by 100.

After this operation we will multiply the obtained numbers by 0.3 factor.

This will ensure that if a signal will arrive in the interval $[B + m \cdot k - 10^{-12}, B + m \cdot k + 10^{-12}]$ we can be sure that it encodes the sum $B + m \cdot k$.

6.4 Power decrease

Beam splitters are used in our approach for dividing a ray in two subrays. Because of that, the intensity of the signal is decreasing. In the worst case we have an exponential decrease of the intensity. For instance, in a graph with $m + 1$ nodes (destination node is not counted because there is no split there), each signal is divided (within each node) into 2 signals. Roughly speaking, the intensity of the signal will decrease 2^m times.

This means that, at the destination node, we have to be able to detect very small fluctuations in the intensity of the signal. For this purpose we can use a photomultiplier [6] which is an extremely sensitive detector of light in the

ultraviolet, visible and near infrared range. This detector multiplies the signal produced by incident light by as much as 10^8 , from which even single photons can be detected.

Also note that this difficulty is not specific to our system only. Other major unconventional computation paradigms, trying to solve NP-complete problems share the same fate. For instance, a quantity of DNA equal to the mass of Earth is required to solve Hamiltonian Path Problem instances of 200 cities using DNA computers [9].

6.5 Technical challenges

There are many technical challenges that must be solved when implementing the proposed device. Some of them are:

- Cutting the optic fibers to an exact length with high precision. Failing to accomplish this task can lead to errors in detecting if there was a fluctuation in the intensity at moment $B + m * k$,
- Finding a high precision oscilloscope. This is an essential step for measuring the moment $B + m * k$ with high precision (see section 6.3).

7 Improving the device

The speed of the light in optic fibers is an important parameter in our device. The problem is that the light is too fast for our measurement tools. We have either to increase the precision of our measurement tools or to decrease the speed of light.

It is known that the speed of light traversing a cable is significantly smaller than the speed of light in the void space. Commercially available cables have limit the speed of the ray wave up to 60% from the original speed of light. This means that we can obtain the same delay by using a shorter cable.

However, this method for reducing the speed of light is not enough for our purpose. The order of magnitude is still the same. This is why we have the search for other methods for reducing that speed. A very interesting solution was proposed in [10] which is able to reduce the speed of light by 7 orders of magnitude and even to stop it [3, 13]. In [3] they succeeded in completely halting light by directing it into a mass of hot rubidium gas, the atoms of which, behaved like tiny mirrors, due to an interference pattern in two control beams.

This could help our mechanism significantly. However, how to use this idea for our device is still an open question because of the complex equipment involved in those experiments [10, 13].

By reducing the speed of light by 7 orders of magnitude we can reduce the size of the involved cables by a similar order (assuming that the precision of the measurement tools is still the same). This will help us to solve larger instances of the problem.

8 Conclusions and further work

The way in which light can be used for performing useful computations has been suggested in this paper. The techniques are based on the massive parallelism of the light ray.

It has been shown the way in which a light-based device can be used for solving the Exact Cover problem.

Further work directions will be focused on:

- Implementing the proposed device,
- Our device cannot output the exact cover representing the solution. It can only say if there is a solution or not. However, the XC YES/NO decision problem is still a NP-complete problem [7]. We are currently investigating a way to store the visited arcs so that we can easily reconstruct the path,
- Finding other non-trivial problems which can be solved by using the proposed device,
- Finding other ways to introduce delays in the system. The current solution requires cables that are too long and too expensive,
- Using other type of signals instead of light. Possible candidates are electric power and sound.

References

- [1] Adleman L (1994) Molecular computation of solutions to combinatorial problems. *Science* 266:1021-1024
- [2] Agrawal GP (2002) Fiber-optic communication systems. Wiley-Interscience; 3rd edition
- [3] Bajcsy M, Zibrov AS, Lukin MD (2003) Stationary pulses of light in an atomic medium. *Nature* 426:638-641.
- [4] Cormen TH, Leiserson CE, Rivest RR (1990) Introduction to algorithms. MIT Press
- [5] Faist J (2005) Optoelectronics: silicon shines on. *Nature*, 433:691-692
- [6] Flyckt SO, Marmonier C (2002) Photomultiplier tubes: Principles and applications. Photonis, Brive, France
- [7] Garey MR, Johnson DS (1979) Computers and intractability: A guide to NP-Completeness. Freeman & Co, San Francisco, CA
- [8] Goodman JW (1982) Architectural development of optical data processing systems. *Aust. J. Electr. Electron. Eng.* 2:139-149

- [9] Hartmanis J (1995) On the weight of computations. *Bulletin of the EATCS* 55:136-138
- [10] Hau LV, Harris SE, Dutton Z, Behroozi CH, (1999) Light speed reduction to 17 meters per second in an ultracold atomic gas. *Nature* 397:594-598
- [11] Henkel C, Frisco P, Tengely Sz (2005) An algorithm for SAT without an extraction phase. *DNA Computing, Eleventh International Meeting on DNA Based Computers, LNCS 3892*, 67-80
- [12] Lenslet website, www.lenslet.com
- [13] Liu C, Dutton Z, Behroozi CH, Hau LV (2001) Observation of coherent optical information storage in an atomic medium using halted light pulses. *Nature* 409:490-493
- [14] Murphy N, Naughton TJ, Woods D, Henley B, McDermott K, Duffy E, van der Burgt PJM, Woods N (2006) Implementations of a model of physical sorting. *From Utopian to Genuine Unconventional Computers workshop, Adamatzky A, Teuscher C, (editors), Luniver Press* 79-100
- [15] Naughton TJ (2000) A model of computation for Fourier optical processors. In Lessard RA, Galstian T (editors), *Optics in Computing, Proc. SPIE* 4089:24-34
- [16] Oltean M (2006) A light-based device for solving the Hamiltonian path problem. *Unconventional Computing, Calude C. (et al.) (Eds), LNCS 4135, Springer-Verlag*, 217-227
- [17] Oltean M (2007), Solving the Hamiltonian path problem with a light-based computer, *Natural Computing, Springer-Verlag* (accepted)
- [18] Paniccia M, Koehl S (2005) The silicon solution. *IEEE Spectrum, IEEE Press*, October
- [19] D. Pisinger. *Dynamic Programming on the word RAM. Algorithmica*, 35:128-145, 2003
- [20] Reif JH, Tyagi A (1997) Efficient parallel algorithms for optical computing with the discrete Fourier transform primitive. *Applied optics* 36(29):7327-7340
- [21] Rong H, Jones R, Liu A, Cohen O, Hak D, Fang A, Paniccia M (2005) A continuous-wave Raman silicon laser. *Nature* 433:725-728
- [22] Rong H, Liu A, Jones R, Cohen O, Hak D, Nicolaescu R, Fang A, Paniccia M (2005) An all-silicon Raman laser. *Nature* 433:292-294
- [23] Schultes D (2005) Rainbow Sort: Sorting at the speed of light. *Natural Computing, Springer-Verlag*, 5(1):67-82

- [24] Sloane N, The on-line encyclopedia of integer sequences. *http* :
//www.research.att.com/~njas/sequences/A023758
- [25] Optical Character Recognition @ Wikipedia,
http://en.wikipedia.org/wiki/Optical_character_recognition
- [26] Woods D, Naughton TJ (2005) An optical model of computation. *Theoretical Computer Science*, 334 (1-3):227-258